

NANO-CERAMIC®




WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



Marine

What is NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating is a revolutionary, ultra-durable thin film ceramic clear-coating that provides superior scratchresistance and semi-permanent protection for all exterior and interior yacht surfaces.

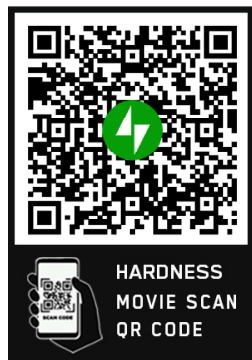

Jetpack
VideoPress

What makes NANO-CERAMIC Thin Film Coating so different?

NANO-CERAMIC Thin Film Coating is more than 4 times stronger than factory paint finishes and can absorb damage that would otherwise affect the appearance and integrity of your paint. This extremely durable ceramic coating reduces swirl marks and light scratches while protecting and preserving factory gelcoats or paints.




Conventional paints like acrylic urethane are simply not strong enough.

NANO-CERAMIC Thin Film Coating is completely resistant to acidic environmental substances like bird droppings, bug residue, acid rain, and tree sap, unlike your yachts factory paint, which can be permanently etched and damaged by these substances. NANO-CERAMIC provides advanced protective barriers to your yacht body and hull surfaces, maintaining both high-gloss and matte finishes.


What are the benefits of applying NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating provides yachts with a superior, near-permanent, clear coating that is resistant to chemical etching, harder than factory paint finishes, and able to greatly reduce swirl marks and fine scratches while leaving a superior, hydrophobic surface that is easier to clean and stays cleaner longer.


Clearcoat, Glass hull and body materials can be treated with one of our CERAMIC Thin Film Coatings. Restore the color and shine with advanced hydrophobic and UV protection. Even chrome, aluminum, and other metals can have added protection, as our coatings can withstand temperatures of over 850°C.




Step 1 The surface layer of factory gelcoat or paint is damaged and contaminated.




Step 2 Decontamination and polishing the gelcoat to produce a smooth and even surface.



Step 3 Restoration of coating thickness with a super-durable layer of NANO-CERAMIC Thin Film Coating.

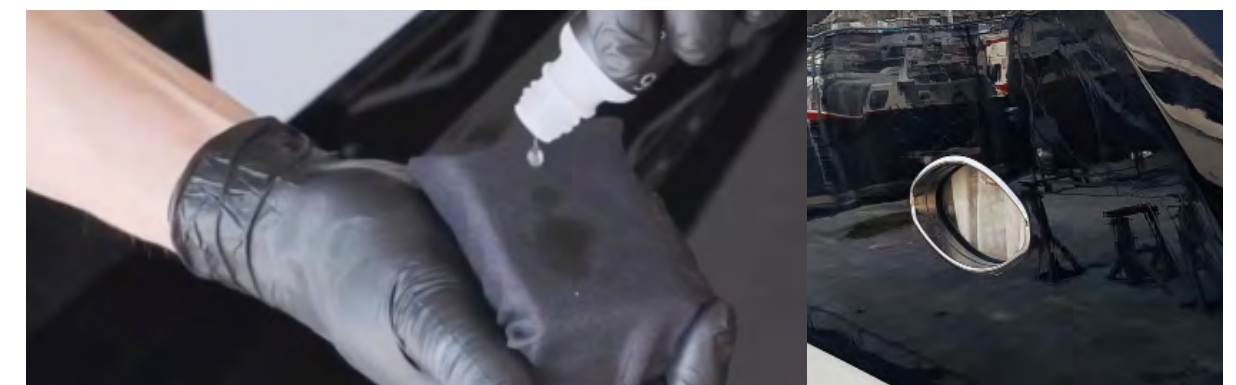

Thin Film Clean & Protect

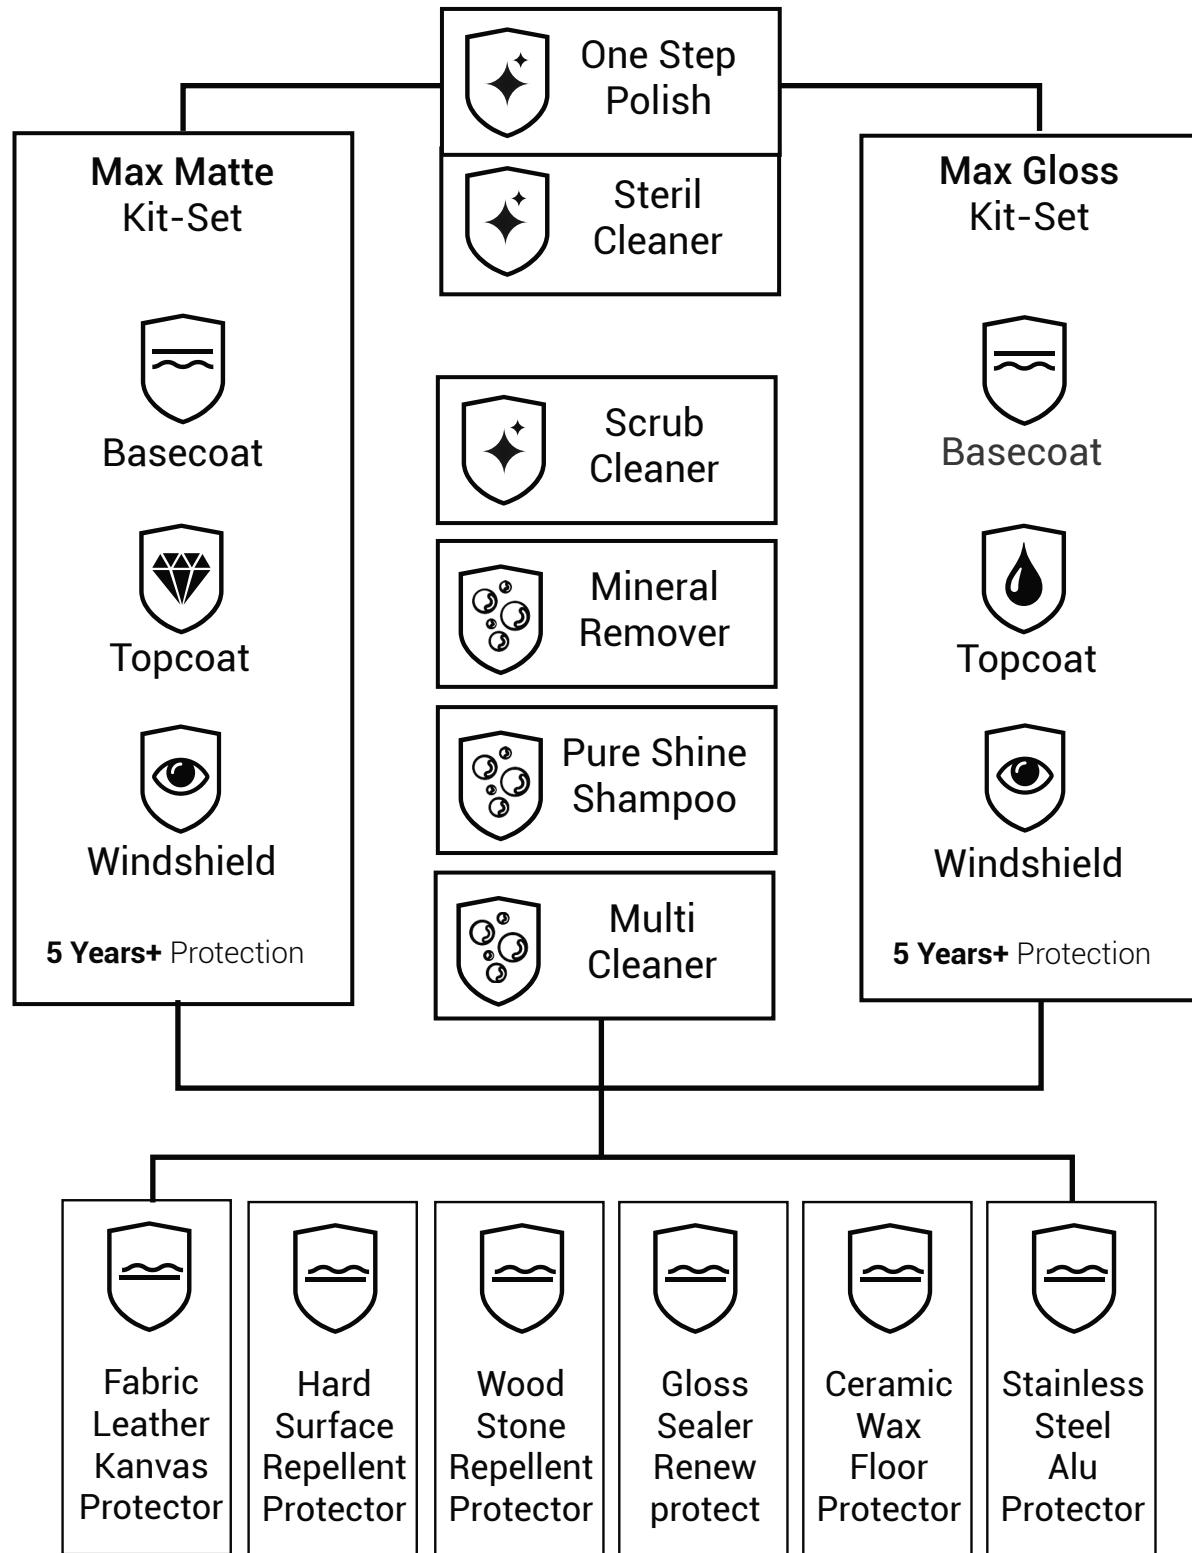

Every surface can always be like new ...





VIDEO
PRODUCT
SCAN
QR CODE



SIO3 MAX GLOSS

Hull & Windshield Protection

for gelcoat / glass / chrome

Product ID : SIO3150-MAX-GLOSS 3x50ml 10 Micron
Consumption : +/- 2 ml/m²
Reachable area : +/- 25m² Body + 25m² Windshields
Used for : Gelcoat, acrylic, glass, chrome, stainless
Application field : Marine

Your yacht will stand out! These Kit-Sets contain all to make your yacht protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Lasts for 5 Years+ (2 Years on Glass)



How to use: Page 20

- Easy to apply**
- Cut cleaning costs**
- Anti-water spot
Anti-corrosion**
- Super hydrophobic**
- Self-cleaning stays cleaner longer**
- Anti-scratch**
- Visibility safety**
- Protects your investment**

Applicator:



VIDEO
PRODUCT
SCAN
QR CODE



SIO5 MAX MATTE

Hull & Windshield Protection

for gelcoat / glass / chrome

Product ID : SIO5150-MAX-MATTE 3x50ml 5 Micron
Consumption : +/- 2 ml/m²
Reachable area : +/- 25m² Body + 25m² Windshields
Used for : Clearcoat, acrylic, glass, chrome, stainless
Application field : Marine

Your yacht will stand out! These Kit-Sets contain all to make your yacht protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Lasts for 5 Years+ (2 Years on Glass)



How to use: Page 20

- Easy to apply**
- Cut cleaning costs**
- Anti-water spot
Anti-corrosion**
- Super hydrophobic**
- Self-cleaning stays cleaner longer**
- Anti-scratch**
- Visibility safety**
- Protects your investment**

Applicator:





APPLY
MOVIE SCAN
QR CODE



STEP

One Step Polish for scratch removal

Product ID : STEP0250 250ml
Consumption : 5ml/m²
Used for : Clearcoat, gelcoat, glass and acrylic
Application field : Marine





Only this High Quality Polish Compound together with the recommended pads assure that every yacht can be polished from deep scratches till high gloss/zero swirl in one single step.

This saves an enormous amount on working hours as polishing takes normally 65% of the total process to make a yacht a thin film nano layer.

Purple Wool Heavy Cutting Pad cuts like natural sheepskin but finishes like a polish pad. Aggressively removes P1500 grit scratches, leaving a lustrous finish with no hazing by reducing compounding swirls.

The Cutting Pad is constructed with a blue foam and white microfiber. The Micro Cutting Pad with orange foam and white microfiber, the Polishing Pad is constructed with a black foam and black microfiber.

The pad serie is available 5.5 inch and 3 inch.

-  **Cut polish costs**
-  **Zero swirl and hologram**

Applicator:



APPLY
MOVIE SCAN
QR CODE



CLEAN

Steril Cleaner for hard surfaces

Product ID : CLEAN0500 500ml / CLEAN5000 5L
CLEAN020L 20L
Consumption : +/- 3.3 ml/m²
Used for : Clearcoat, gelcoat, glass, chrome, mirrors
Application field : Marine



100% Steril with nano interlock technology (active lifting encapsulate the grease from the surface)

- Surface cleaning and residue removal.
- Cleaning gloves, notebooks, phones or any other item entering the cleanroom.
- Wipe down for pass-through to controlled environments.
- Pretreatment for the application of thin film coating

100% Steril


-  **Easy to apply spray & wipe**
-  **Indoor Outdoor**
-  **Remove grease**
-  **100% Steril**
-  **No streaking**

Applicator:





APPLY
MOVIE SCAN
OR CODE

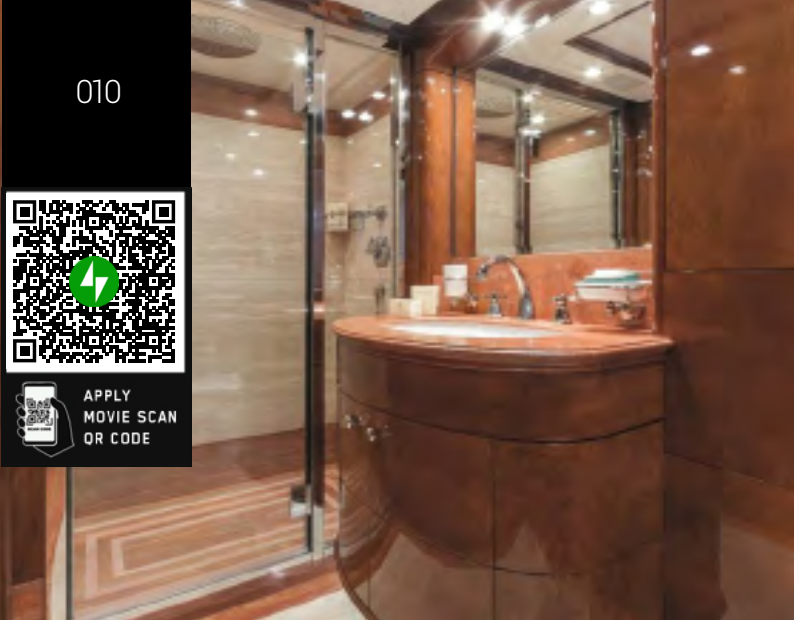

APPLY
MOVIE SCAN
OR CODE

SIRP

Repellent Protector for glass / ceramics / mirrors



Product ID : SIRP0500 500ml SIRP5000 5L
SIRP020L 20L

Consumption : +/- 2 ml/m²

Used for : Glass, acrylic, chrome, vinyl

Application field : Shower places.

SIRP is an ultra long-lasting invisible surface coating which forms semi-permanent molecular bonds with the surface. The main function of treating hard surfaces with SIRP is to seal tiny pores, making it a smoother surface that will repel water and contaminants. This product is indispensable for bathrooms

- Two simple steps: Clean with our Steril Cleaner and Apply
- Makes the surface much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces
- This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Will last 12 washes

How to use: Page 20



Easy to apply



**Indoor
Outdoor**



Cut cleaning costs



Anti-water spot



**Super
hydrophobic**



**Self-cleaning
Stays cleaner longer**



**Visibility
Safety**

Applicator:



SHRE

Pure Shine Shampoo for all exterior / interior surfaces



Product ID : SHRE1000 1L / SHRE5000 5L
SHRE020L 20L

Consumption : 20 ml : 10 Liter Water

Used for : Cleaning all exterior / interior surfaces

Application field : Marine

Reactivating Pure Shine Shampoo is an advanced technology, multi-purpose foaming cleaner containing a rinsing aid that will leave hard surfaces nearly dry after rinsing with clean water.

To assure the "easy-to-clean" effect that our nano layers provide, surfaces should be free of dyes, waxes or polymer sealants.

This multi-purpose cleaner contains no polymers or colors and will not leave a film of chemicals behind on the surface.

100% Safe to use for cleaning all non-porous surfaces and meets food grade classification for kitchens.

Contains no colouring chemicals which can discolor surfaces.

Dilution ratio 1: 500 (super economical)



Easy to apply



Easy to clean



**Stays cleaner
longer**



Food grade



Biodegradable

Applicator:





APPLY
MOVIE SCAN
OR CODE



APPLY
MOVIE SCAN
OR CODE

WSRE

Mineral Remover for hard surfaces



Product ID : WSRE0500 500 ml / WSRE5000 5L
WSRE020L 20L

Consumption : +/- 2 ml/m²

Used for : Hard surfaces

Application field : Marine

This fully biodegradable stain remover is made with a superior synergistic blend of environmentally friendly acids to boost cleaning performance and potential cost-savings. WSRE is ideal for removing mineral deposits from glass, steel, porcelain, and many other materials.

- WSRE is anti-corrosion and safe to use on all hard surfaces.
- WSRE prevents the deposition of soap residue and can be used to dissolve limescale formed by hard water.
- GHS label: NO health hazard label or acute toxicity
- Readily biodegradable (OECD)

Safe to use



**Easy to Apply
Spray and Clean**



Safe for skin



Non-corrosive



**Dissolves calcium
and magnesium**



**Reduce spot-
ting & filming**

Application: Wet the surface, and wait 1 minute so that the calcium and magnesium can dissolve. Wipe away any residue and, if necessary, use our Scrub Cleaner to clean it more deeply.

SCRUB

Scrub Cleaner for hard surfaces



Product ID : SCRUB0250 500 ml / SCRUB5000 5L
SCRUB020L 20L

Consumption : +/- 2.5 ml/m²

Used for : Hard surfaces

Application field : Marine

Scrub Pretreatment Cleaner is a smooth rubbing compound, suitable for scrubbing glass, steel, porcelain and many other materials without scratching the surface.

If you need more scouring power, then please use our specially designed scrub pad.

Leaves no scratches behind after treatment



Non-scratching

Applicator:





APPLY
MOVIE SCAN
OR CODE



MPCL

Multi Purpose Cleaner for interior Surfaces

Product ID	: MPCL0500 500 ml / MPCL5000 5L MPCL020L 20L
Consumption	: +/- 2.5 ml/m ²
Used for	: Cleaning all interior surfaces
Application field	: Marine

The All-Purpose Cleaner is a fast, all-surface interior cleaner, low foaming, odor free, and especially suitable for removing stubborn stains from carpets, fabrics, vinyl, plastics and leather safely.

- It is very easy to clean dirt.
- Ready-to-use mixture with the right chemical strength and safe to use
- Of course it is safe for the surface of fabrics, carpets, plastics, leather, rubber and does not fade paint.
- Quickly remove dirt, dust and food scraps



Easy to apply
spray & wipe



No discoloration



Indoor
Outdoor



Quick to use



Spills are easy
to remove



Cleaner for longer

Applicator:



Safe to use does not harm the surface



APPLY
MOVIE SCAN
OR CODE



Untreated

After treatment

Untreated

After treatment

SIGS

Gloss Sealer for hard surfaces

Product ID	:SIGS0500 500 ml / SIGS5000 5L SIGS020L 20L
Consumption	: +/- 2.5 ml/m ²
Used for	: Marble / granite / wood / plastics / metal
Application field	: Marine

The Si-Gloss Sealer forms semi-permanent molecular bonds to protect hard surfaces.

- Brings dull and weathered surfaces back to life, leaving a clean satin-gloss finish
- This sealant has a hydrophobic effect, that makes it an ideal product for preventing drying rings on tables
- The bacterial disinfectant present in the hydrophobic nano layer
- Eliminates viruses and bacteria and reduces the chance of contamination, the disinfection process continues as long as the nano layer is present on the surface.

Renew every surface



Easy to apply
spray & wipe



Indoor
Outdoor



Hydrophobic:
Water & oil repellent



Resists drying rings



Anti-water spot



Satin-gloss

Applicator:





APPLY
MOVIE SCAN
OR CODE

SIFP

Floor Protector for hard flooring



Product ID : SIFP1000 1L / SIFP5000 5L / SIFP020L 20L
Consumption : +/- 5ml/m² or ready to use 50ml/m²
Used for : Marble / granite / tile / wood flooring (teak)
Application field : Marine, exterior, interior

Floor Nano-Polish consists of the latest advanced material composition, making a flexible, yet harder and more durable floor protection than our competitors.

A simple 1:9 dilution with normal water allows an easy to apply polish time saving process that requires no additional water to be added.

Polish the floor until almost dry, then remove the residue.

Wait 10 minutes and finish buffing to a high gloss with a fine polish pad.

Protects 2 times longer than other solutions.

- Indoor
Outdoor**
- Easy to apply**
- Hydrophobic:
Water & oil repellent**
- Cut cleaning costs**
- Stays cleaner
longer**
- Breathable
& flexible**
- Superior
hardness**

Applicators:



SIO7

Protector for stainless / aluminum / chrome



Product ID : SIO70KIT 1oz
Consumption : +/- 2 ml/m² reachable area +/- 15m²
Used for : Stainless steel, aluminum, chrome, paint, varnish
Application field : Marine

How to use: Page 20

SIO7 is an ultra long-lasting invisible surface coating which forms semi-permanent molecular bonds with the surface.

- Two simple steps: Clean and Apply
- Fingerprints can easily be removed with a microfiber towel.
- Anti-bacterial properties boost hygiene level
- Surface has an outstanding hydrophobic effect, and stays cleaner longer.
- The coating has a hardness of H9 (anti-scratch)
- Protects against corrosion.

Lasts for 5 years+

- Indoor
Outdoor**
- Cut cleaning time**
- H9
hardness**
- Super
hydrophobic**
- Anti-corrosion**
- Anti-finger-
print**
- Self-cleaning
Cleaner longer**

Aplikator:





APPLY
MOVIE SCAN
OR CODE



APPLY
MOVIE SCAN
OR CODE

SIO8

Protector

for natural wood / natural Stone



Product ID	: SIO80500 500ml / SIO85000 5L SIO8020L 20L
Consumption	: +/- 40 ml/m ²
Used for	: Natural stone, lacquered wood
Application Field	: Marine

How to use: halaman 20

The SIO8 invisible sealant forms a durable bond that is breathable and flexible.

- Water and dirt are effectively repelled.
- Hygiene goes to a higher level.
- This coating has an outstanding hydrophobic effect, making surfaces stay cleaner and drier longer.
- Cleaning intervals on walls are longer, and the need for restoration will be greatly reduced.
- Natural stone and wood are protected against the penetration of pollution.

Lasts for 5 years

- Easy to apply
clean & dry & spray
- Sprayable
- Invisible
- Indoor
Outdoor
- Breathable
& flexible
- Super
hydrophobic
- Spills are easy
to remove
- Stays cleaner
longer

SIFX

Protector

for fabric / leather / canvas



Product ID	: SIFX0500 500ml / SIFX5000 5L SIFX020L 20L
Consumption	: +/- 20ml/m ² (leather) 40ml/m ² (textile)
Used for	: Fabric, leather, carpets and canvas
Application field	: Marine

How to use: halaman 20

The SIFX invisible sealants form a durable bond that is breathable and flexible with textile fibers and leather surfaces.

- Water and dirt are effectively repelled, and spills are easier to remove.
- Hygiene goes to a higher level.
- This coating has an outstanding hydrophobic effect, making fabrics, leather, and carpets stay cleaner and drier longer.
- Cleaning intervals on carpets are longer, and the need for restoration will be greatly reduced.

Lasts 1-3 years (depending traffic)

- Easy to apply
clean & dry & spray
- Sprayable
- Transparent
original colours remain
- Indoor &
outdoor use
- Breathable &
flexible
- Hydrophobic
reppel water & oil
- Easy to clean
- Cleaner for longer

HOW TO USE:

NANO-CERAMIC SIRP, SIO7, SIO8, SIFX, SIO3-SIO5 MAX

These products can be stored for up to 24 months (*in a dry, temperature-stable, dark environment*)

Ambient temperature:

5-30°C Avoid direct sunlight and/or high air humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend to use latex or nitrile gloves to make sure your hands are protected from any possible damage to your skin. Use a mask for extra safety.



Mask



Nitrile gloves



Applicators

CLEANING

Clean the surface thoroughly with our Steril Cleaner until it is absolutely clean. If necessary, use our Scrub Cleaner or Reactivating Pure Shine Shampoo in advance. Make sure that all contamination is removed so that the glass coating can bind properly onto a clean surface. Make sure that the surface is completely dry before application!

APPLICATION OF SIRP

Spray a layer of nano SIRP on the surface and rub it in with a dry microtowel, keep rubbing it into the surface with strong pressure and wipe until all the product is even and scrubbed and only a little hazing / residue is visible Gently wipe off this hazing / residue with a clean microfiber cloth after about a minute There is only a little pressure needed to remove the hazing completely. Curing time 1 hour.

APPLICATION OF SIO7

Shake the bottle very well before use! Take a soft cotton pad and pour a few drops of the coating on it (start with small amounts, only a little product is needed). Moisten all the glass, steel, or wood surfaces evenly. Wait 2 minutes. When applied correctly, you can now see a light grey haze on the surface. Gently polish away the haze after all solvents are vaporized by using a clean (microfiber) cloth. Curing time 1 hour.

The MAIN FUNCTION OF SIRP AND SIO7 is to seal the pores of hard surfaces and to prevent against stubborn water spots and fingerprints

APPLICATION OF SIO8 AND SIFX

Clean the surface thoroughly until it is absolutely clean. Make sure that all contamination is removed so that the sealant can bind properly onto a clean surface. Make sure that the surface is completely dry before application! Shake the bottle very well before use! Put it into a sprayer and spray until the surface is saturated, and let the surface dry for 24 hours. Shake the bottles very well before use! Put it into a sprayer and spray until the surface is saturated, and let the surface dry for 24 hours.

CURING TIME

Immediately after polishing, the coating is dry and resistant to touching. At normal ambient temperature, the coatings are completely cured after approximately 12 hours.

APPLICATION OF SIO3-SIO5-MAX

Our coatings have best results on new on almost like new surfaces, we recommend to polish the surface if needed. Wear nitril gloves to clean the surface with our Steril Pretreatment Cleaner. (without wearing gloves, the oil from your hands may appear via the towel onto the surface) !!

Use more than one clean cloth to remove the dirt from the surface. (Please make sure you don't brush the dirt around on the surface by using dirty clothes.) Making the clear paint-gelcoat-chrome-glass-surface clean is the most important issue. If the surface is not super steril than you will experience chemical reactions between our coatings and the still available contamination what is then visible into the ceramic layer when it is cured. In that case you will need to polish the surface again. So please don't hurry in carrying out this preparation work, but instead focus on this for 100%.

Learn the right application technique > Watch and Study the Apply Video on the packaging (fragment **BASE COATING SIBC**)

Use nitril gloves! Remove the plastic inner closure from the bottle and put in the dripper. Shake bottle before use! We recommend to apply the surface in easy to handle segments of about 40 x 40cm, following the panels shape and corner lines and use these lines for overlaps. Put 8-10 drops BASE COAT on the suede mini towel using the applicator block underneath, divide the coating properly by going 3 times over the same surface, wait till it lights up (+/- 25sec) and remove the residue carefully, and buff it lightly use a separate micro towel for this. Wait 2 hours before you continue with the application of one of our hydrophobic Top Coatings. After 2 hours BASE COAT is 80% cured and ready to receive one of our TOP COATINGS. After about 7 days the BASE COATING has been fully cured and is almost unremovable.

(fragment TOP COATING **SIO3-SIO5-MAX**)

Use nitril gloves! Remove the plastic inner closure from the bottle and put in the dripper. Shake the bottle before use! We recommend to apply the surface in easy to handle segments following the panel shape and corner lines and use these lines for overlaps. Put 6-8 drops 40 x 40cm, (if start use more drops as the towel is otherwise too dry) TOP COATING on the suede mini towel using the applicator block underneath. Start dividing it from out of the middle of the surface and keep spreading it around by light pressure in criss-cross motions. until the product is evenly distributed. MOST IMPORTANT keep on doing this till no product residue is visible anymore. If you use too much coating and/or spreading it out from example one start position in a corner of a panel then you will not be able to divide it properly towards the other side and it will roll-up on each other and form a not equal layer. To use too much coating and not divide it equally is the second most critical point !! When you apply TOP COATING in this correct way, then there is no need to use a micro towel for polishing anymore.

(fragment **SAFETY VISION SIO2**)

Apply the nano layer SAFETY VISION COATING with the cotton apply pad. Spread 10-15 drops 50 x 60cm of SAFETY VISION COATING on the cotton pad and apply rub it in motions on the windshield with firm pressure until all of the product is evenly distributed and only very little residue is visible. Remove the coating residue with a soft clean microfiber cloth after about a minute and buff the glass/panels gently to take the veils away. There is not much pressure necessary to remove it completely. Note: dry the dripper and close the bottles tightly if you want to save the content for future use. At normal ambient temperature the Nano layers are sufficiently cured after approximately 6 hours (or 2 hours Infrared) (avoid water contact).



APPLY VIDEO
BASE COAT
SCAN
QR CODE



APPLY VIDEO
TOP COAT
SCAN
QR CODE



APPLY VIDEO
SAFETY VISION
SCAN
QR CODE

What is NANO-CERAMIC Permanent Coating?

NANO-CERAMIC permanent coating is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and permanent protection for all exterior or interior surfaces.

NANO-CERAMIC permanent coating is 300°C resistant and more than 6 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Low Maintenance for decades to come!

Our NANO-CERAMIC permanent coating is rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on our website.

Can NANO-CERAMIC Permanent Coating be applied on any surface?

The NANO-CERAMIC permanent coating can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.



Is NANO-CERAMIC Permanent Coating self-cleaning?

NANO-CERAMIC permanent coating provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating is resistant to water vapor and water absorption.

Can our hydrophobic coatings increase acceleration time and speed while simultaneously reducing fuel consumption?

Yes, the superhydrophobic surface has a good drag reduction effect, and the maximum drag reduction rate is up to 23.4%.


In a new analysis from IPTEK ITS 2023 concerning Drag Reduction, the following conclusions have been obtained. It was found that there was an increase in acceleration due to drag reduction on the ship model treated with a superhydrophobic coating, showing a 31% improvement compared to the non-coated surface and a 27% improvement compared to a conventionally anti-fouling coated surface.

As published in the International Journal of Marine Engineering Innovation and Research. Click [here](#) for the IPTEK analyses.

Other paints are simply not suitable for longterm harsh outdoor environments.

In order to avoid poorly maintained properties (concrete rot, chipped and weathered paint, etc) for the next decades, our Permanent Coating System is simply the best solution to keep the value of your investment in place.

Superior in Color & Gloss Retention

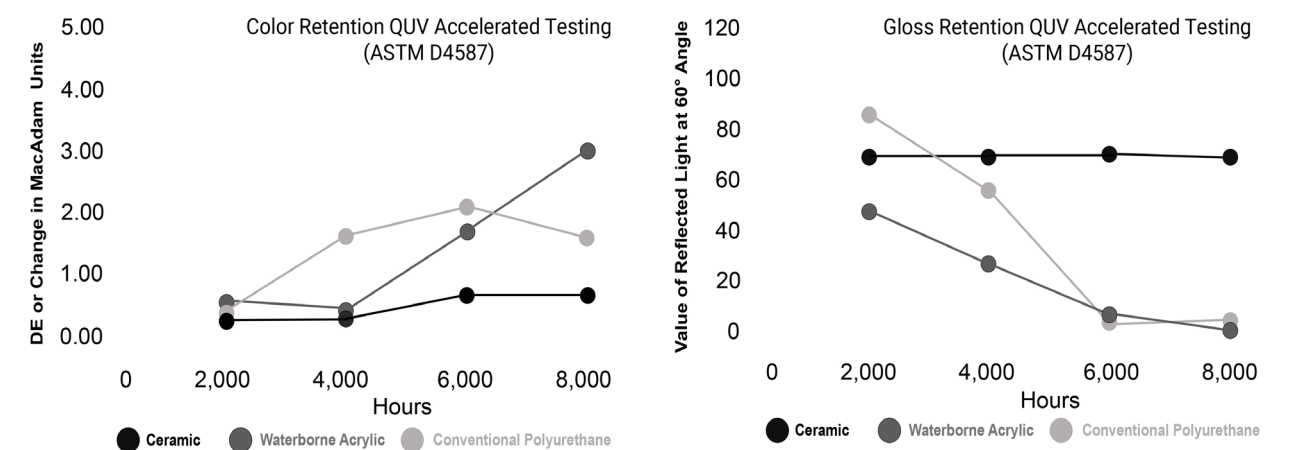

A special selection of high grade tinting chemicals computerized dispersed in a superior ceramic resin.


Conventional gelcoats are a mixture with Epoxy or Polyurethane resins, of which the quality of resin and pigments are the most important factor in the ultimate strength. Most have a lifespan of 15 years, with hardness, color and gloss retention (sun fading) and manual mixing towards consistent quality being the most common problems in keeping the desired object at an aesthetically pleasing level.

Quality Comparison with traditional coating/paints.

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic	Epoxi	Polyurethane	Ceramic
Primer	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Good	Poor	Excellent
UV Radiation Resistance	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Average	Poor	Excellent
Temperature Resistance	91°C	177°C	263°C	300°C
Thermal Shock Resistance	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Good	Average	Excellent
Water Absorption Resistance	1%	2%	3%	0%
Aging at 70°C	Poor	Good	Average	Excellent
Adhesion Strenght Pull-off	Average	Good	Poor	Excellent
Impact Resistance	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	Yes
Easy to Clean	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime inYears	<7	<15	<15	30+

Ceramic Coating & Paint System

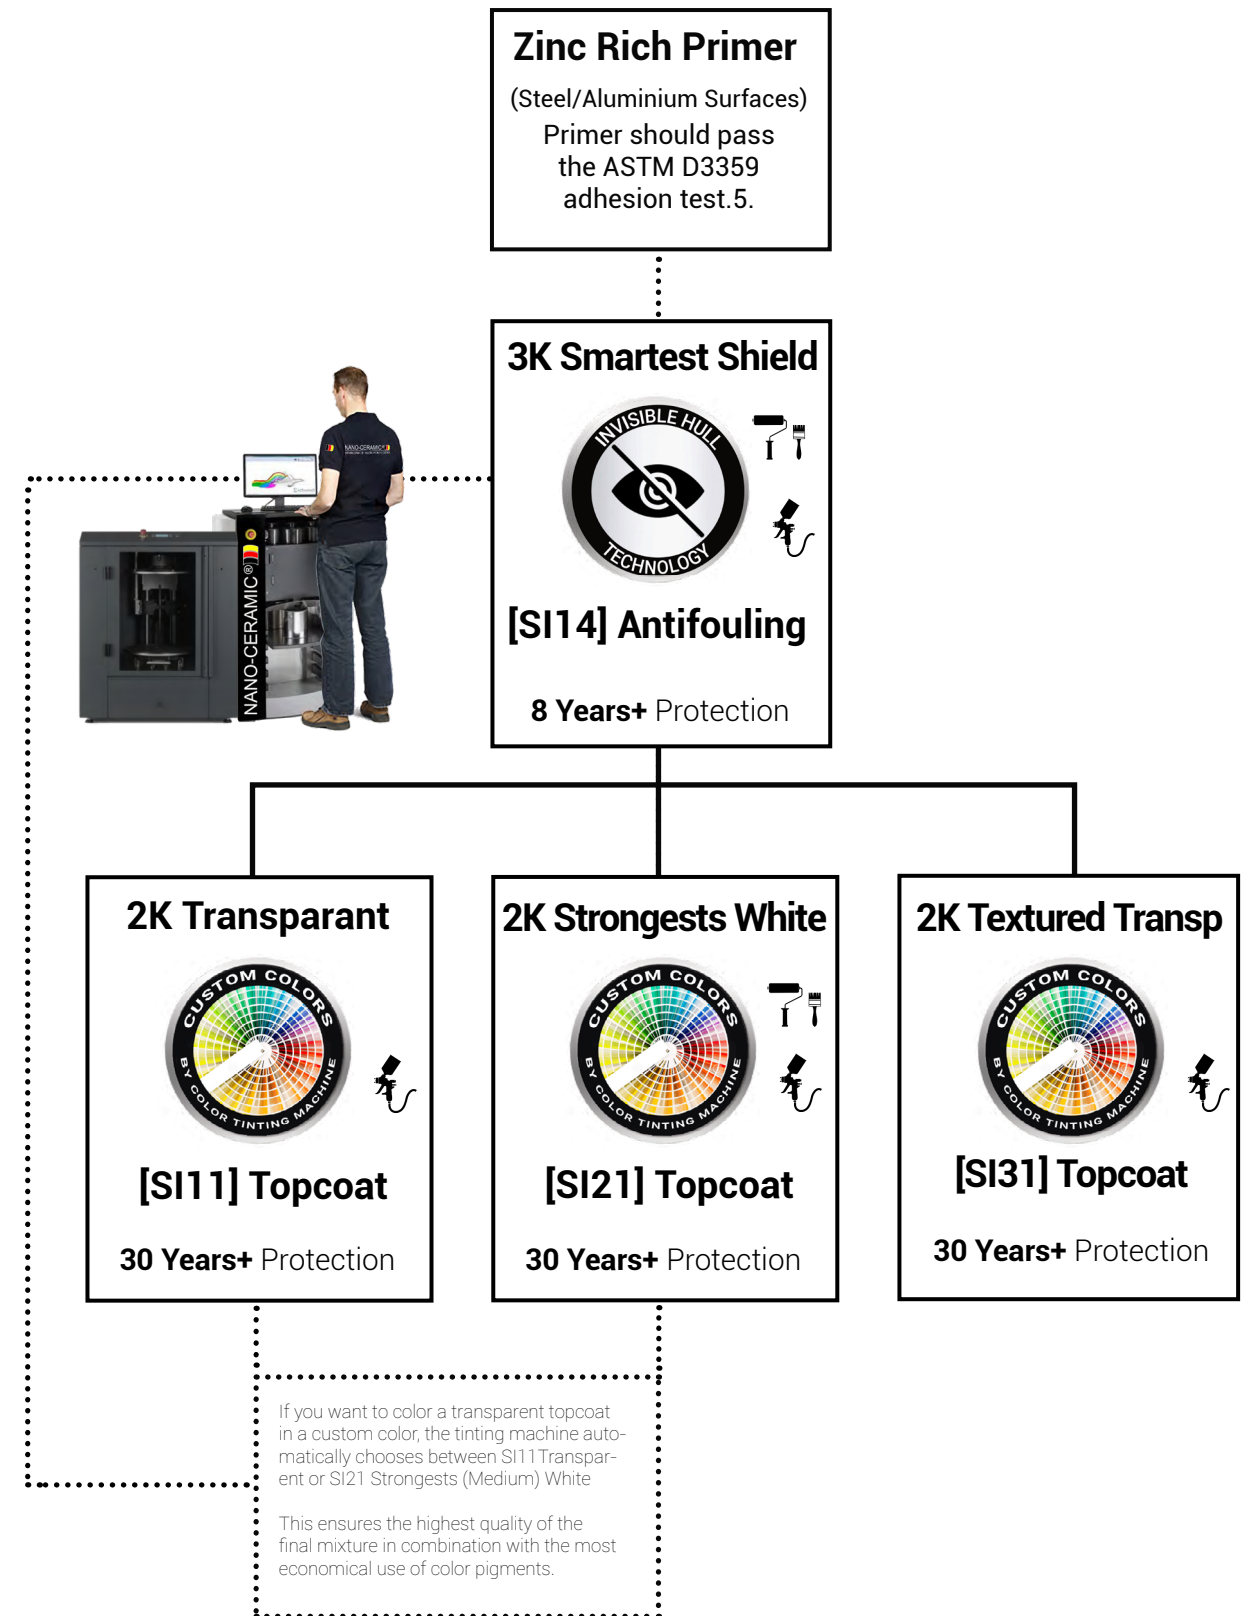



SI11

2-Component (2K)

Topcoat Transparent for glossy surfaces

Product ID	: SI112000 2L / 1.900 gr
Consumption	: 3 layers +/- 270gr/m ² - 285ml/m ² 75 micron = 7m ²
Reachable area	: 2 layers +/- 180gr/m ² - 190ml/m ² 50 micron = 14m ² : 1 layers +/- 90gr/m ² - 95ml/m ² 25 micron = 21m ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, interiors

SI11 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C.

Expected life duration up to 30 years+



How to use: Page 31



SI12

2-Component (2K)

Topcoat Transparent for matte surfaces

Product ID	: SI122000 2L / 1.000 gr
Consumption	: 3 layers +/- 270gr/m ² - 285ml/m ² 75 micron = 7m ²
Reachable area	: 2 layers +/- 180gr/m ² - 190ml/m ² 50 micron = 14m ² : 1 layers +/- 90gr/m ² - 95ml/m ² 25 micron = 21m ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, interiors

SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C.

Expected life duration up to 30 years+



How to use: Page 31



SI21

2-Component (2K)

Paint Strongest White for glossy surfaces

Product ID	: SI212000 2L / 2.400 gr
Consumption	: 3 layers +/- 200gr/m ² - 165ml/m ² 75 micron = 12m ²
Reachable area	: 2 layers +/- 130gr/m ² - 110ml/m ² 50 micron = 16m ²
	: 1 layers +/- 65gr/m ² - 55ml/m ² 25 micron = 24m ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, interiors

SI21 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected life duration up to 25 years+



How to use: Page 31

-  **Easy to apply
Repaintable**
-  **Cut maintenance costs**
-  **Anti-water spot
Anti-corrosion**
-  **Permanent
hydrophobic**
-  **Self-cleaning
stays cleaner longer**
-  **Anti-scratch**
-  **Impact Resistance
1kg / 80cm**
-  **Protects your
investment**

SI14

3-Component (3K)


The Smartest Antifouling black/red/blue/grey/transparent

Product ID	: SI144000-BK SI144000-RD 4L / 4.300gr
	SI144000-BL SI144000-GR SI14400-TR
Consumption	: 2 layers 308gr/m ² - 286ml/m ² = 200 micron / 14m ²
Reachable area	: 1 layers 154gr/m ² - 143ml/m ² = 100 micron / 28m ²
Hardness/Viscosity	: H7
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine Antifouling

SI14 is a revolutionary High-Tech Ceramic Antifouling Paint with a self-polishing amphiphilic biofilm that masks the boat hull surface to the marine organisms.

This world's leading antifouling stores more and releases less non-biocidal agents, resulting in by far the longest maintenance interval of 8 year+ currently available.

How Biofilms form:

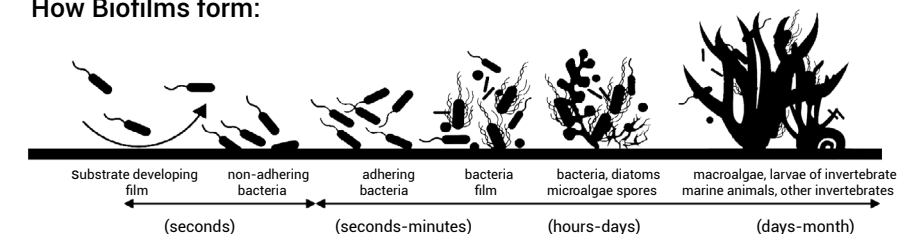

How to use: Page 31

-  **Easy to apply
Repaintable**
-  **Amphiphilic
Invisible Hull Technology**
-  **Cut maintenance costs**
-  **Organic Copper and Tin
Non Biocidal**
-  **Super Sleek Surface
Algae release <6 knots**
-  **Self-cleaning
stays cleaner longer**
-  **Save fuel**
-  **Impact Resistance
1kg / 80cm**
-  **Thermal Shock-
Resistant**

SI31

2-Component (2K)

Textured Transparent Semi Gloss antislip - high impact resistant

Product ID	: SI312000 2L / 2.000gr
Consumption	: 3 layers +/- 222gr/m ² - 222ml/m ² 90 micron = 9m ²
Reachable area	: 2 layers +/- 111gr/m ² - 111ml/m ² 60 micron = 18m ²
	: 1 layer +/- 74gr/m ² - 74ml/m ² 30 micron = 27m ²
Hardness	: H9
Used on	: Gelcoat, fiberglass, steel, aluminium, : plastics, wood, virtually any surface.
Application area	: Marine, exteriors, interiors

SI31 is a clear solvent-based ceramic coating, linked with a ceramic activator, available in semi-gloss and includes sprayable nano particles. Known for its exceptional durability, this coating easily applies to any organic surface without needing a primer. Its textured design makes it perfect for anti-slip needs.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C.
- Zero absorption, waterproof, insulation and heat rejecting

Expected Life Duration up to 30 years+



How to use: Page 31

-  **Easy to apply**
Repaintable
-  **Cut maintenance**
-  **Anti-water spot**
Anti-corrosion
-  **Permanent hydrophobic**
-  **Self-cleaning**
stays cleaner longer
-  **Anti-scratch**
-  **Visibility safety**
-  **Protects your investment**
-  **Impact Resistance**
1kg / 80cm

How to use our Permanent Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

Processing Temperature:

Ambient temperature: 5-30°C
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Application information

The SI11/SI12/SI21/SI14/SI31 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, glass-fiber, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used for ferrous metals that are exposed to coastal and marine environments or in case of problems with the substrate.

Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI31B with the can of SI11A-SI12A-SI21A-SI31A by pouring can B into can A, or measure **exactly by NET WEIGHT** in a ratio of 9:1 **by using a scale** and **mix very well**.

Mix SI14A2800 with SI14C0800 with by pouring can C into can A, or measure **exactly by NET WEIGHT** in a ratio of 7:2 **by using a scale** and **mix very well**, then add the entire content of SI14B0400 or measure **exactly by NET WEIGHT** in a ratio of 7:1 (compared to SI14A2800) **by using a scale** and **mix very well**. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Depending on the surface, material and structure, different application techniques can be used (such as paint rollers or brushes). Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after 7 days. Be aware that the mixed contents cannot be stored longer than 3 hours. If have orange peel you may wet /sand the surface with P1500 and after P2000 and polish with One Step Polish till high shine. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo.

The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo.

Tool cleaning and Thinner solvent

The individual components, as well as the mixing system of the paint sprayer, can be diluted and cleaned using our solvent. All of our paints and coat-

Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves



Professional Paint Sprayer
1.3-1.7mm / 0.05-0.06" nozzle



Paint Roller
(Microfiber)



Respirator



Paint Brush
(acrylic)

SIX1

2-Component (2K)

Primer Micro Zinc Grey

heavy duty - anti-corrosion

Article Nr.	: SIX12000 2L / 3.665gr
Consumption	: 2 layers +/- 130gr/m ² - 110ml/m ² 60 micron = 16m ²
Reachable area	: 1 layer +/- 65gr/m ² - 55ml/m ² 30 micron = 24m ²
Hardness	: H7
Used on	: Steel, Aluminium and other organic surfaces
Application area	: Buildings, marine, airports, offshore structures, bridges



Fast Repaintable



Excellent adhesion

SIX1 is a solvent based micro zinc primer. This primer is used for corrosion protection on stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to one of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 30°C, 1 hours 60°.



Micro Zinc & Wood Grain Filler

SIX2

1-Component (1K)

Primer Wood Grain Filler

surface modifier - absorption reducer

Article Nr.	: SIX12000 2L / 3.250gr
Consumption	: 2 layers +/- 130gr/m ² - 110ml/m ² 50 micron = 16m ²
Reachable area	: 1 layer +/- 65gr/m ² - 55ml/m ² 25 micron = 24m ²
Hardness	: H4
Used on	: Aluminium, concrete, wood and other organic surfaces
Application area	: Buildings, marine, airports, bridges



Fast Repaintable



Excellent adhesion



VOC Free

SIX2 is a waterborne wood filler. This primer is used as surface modification for, wood or concrete to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



SOLV Thinner solvent

for all types of our ceramic paint & coating



Article Nr: : SOLV0400 14oz / 0.8 lbs

All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.

RETA/ACCL Retarder Accelerator



slow down flash time or speed up curing



Article Nr: : RETA0400 14oz / 0.85 lbs ACCL0200 7oz / 0.4 lbs

If your application need longer flash time (longer time to build up the layer with a second or third coat you can add the RETA Retarder.
In case you want to speed up the curing process you can add the high efficient ACCL Accelerator.


Ceramic Paint Color and Gloss Retention QUV Accelerated Testing (ASTM D4587)

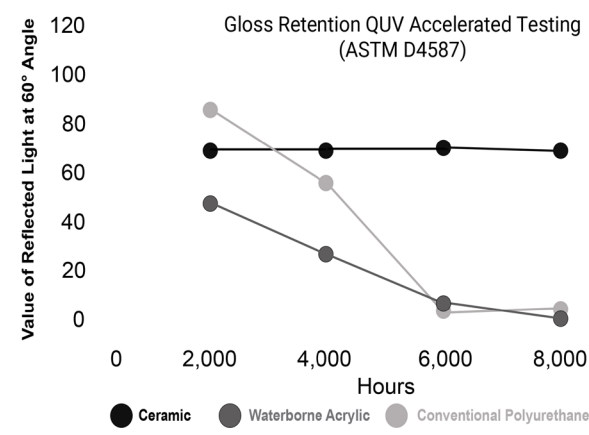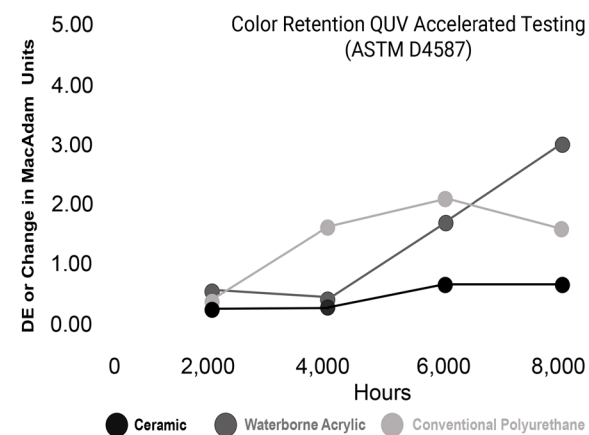

Maintenance Plan Thin Film Coating



Step 1
Washing



Step 2
Polishing




Step 3
Steril Cleaner



Step 4
Basecoat
Curing time: 2 hours
after application




Step 5
Nano Layer
Hydrophobic
Topcoat



Step 6
Curing time:
6 hours in
ambient
temperature

Where to use our coatings:

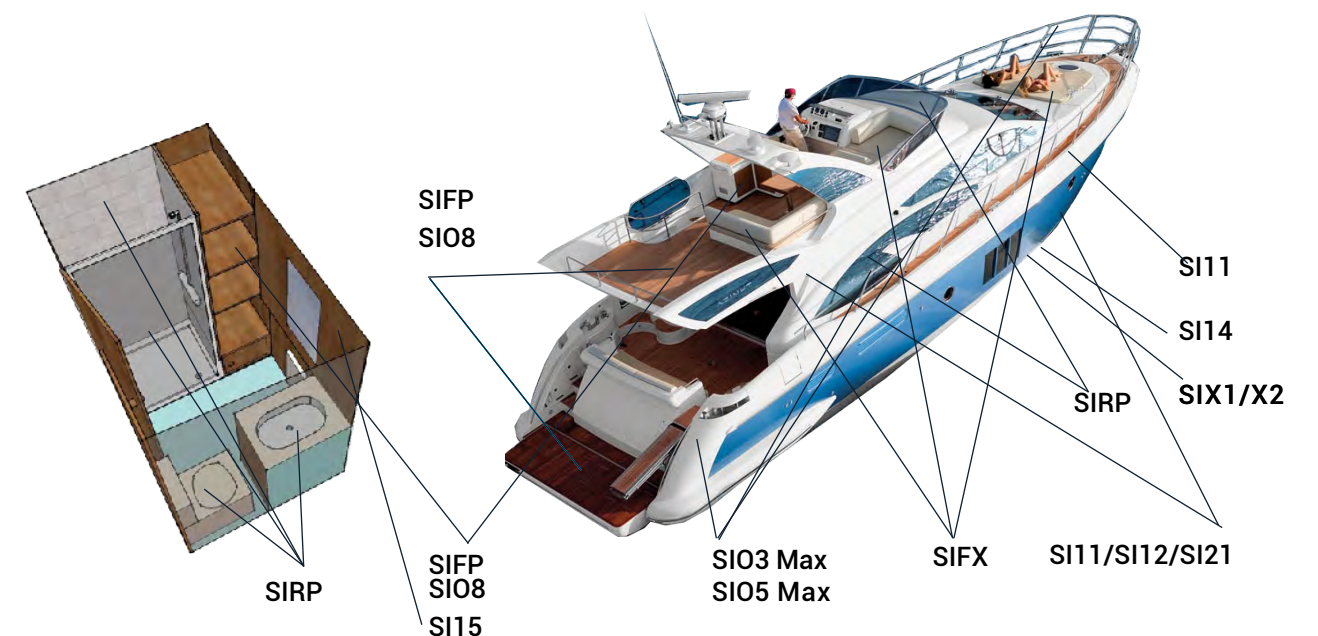

Color card

Other colors need minimal 100kg

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°) SI41 Textured White Semi Gloss 41/69 (20/60°)
 SI15 White Egg Shell (Flat Finish) 18/28 (20/60°) SI42 Textured White Matte 11/21 (20/60°)
 SI21 White Gloss 49/77 (20/60°)
 SI22 White Satin 33/59 (20/60°)

Original	RAL 9018	RAL 3015
Cool white	Papyrus white	Light pink
RAL 9001	RAL 9022	RAL 6007
Cream white	Pearl light grey	Pastel blue
RAL 9002	RAL 9023	RAL 4009
Grey white	Pearl dark grey	Pastell violet
RAL 9003	RAL 1000	RAL 6027
Signal white	Green beige	Light green
RAL 9004	RAL 1001	RAL 7000
Signal black	Beige	Squirrel grey
RAL 9005	RAL 1002	RAL 1036
Jet black	Sand yellow	Pearl gold
RAL 9006	RAL 1011	RAL 8029
White aluminium	Brownbeige	Pearl copper
RAL 9007	RAL 1013	RAL 4012
Grey aluminium	Pearl white	Pearl blackberry
RAL 9010	RAL 1014	RAL 6025
Pure white	Ivory	Pearl gentian blue
RAL 9011	RAL 1015	RAL 6036
Graphite black	Light ivory	Pearl opal green
RAL 9016	RAL 9017	RAL 8016
Traffic white	Traffic black	Mahogany braun

Wood

SI11 Transparent Gloss 51/78 (20/60°)
 SI12 Transparent Matte 11/21 (20/60°)

SI11 Transparent

SI11 Light

SI11 Nut

SI11 Colonial

Industrial

SI11 Transparent Gloss 51/78 (20/60°)
 SI21 White Gloss 49/77 (20/60°)
 SI22 White Satin 33/59 (20/60°)

Transparent

Lumious yellow

Traffic red

Jet black

Golden yellow [Cat]

Leaf green [J.D Deere]

Light grey

Dark grey

Silver grey

Signal brown

Pale brown

Marine

SI12 Transparent Matte 11/21 (20/60°)
 SI41 Textured White Semi Gloss 41/69 (20/60°)
 SI42 Textured White Matte 11/21 (20/60°)

Original

Cool white

Pure white

Cream white

Distant blue

Traffic yellow

Silver gray

Light ivory

Pure white

Cream

Beige

Olive yellow

Military

SI31 Textured Transparent Semi Gloss 41/69 (20/60°)
 SI33 Textured Black Semi Gloss 41/69 (20/60°)

Original

Transparent matte

Blue grey

Jet black

NATO green

Graphite grey

Desert sand

Dark grey camo

Dark brown camo

Olive drap

Very dark drap

RAL 3000

Fire red

Burgundy

Platinum

Jet Black

Turquoise bleu

Light green

Violet blue

Ultramarine blue

Sapphire blue

Signal blue

RAL 6000

Light stone

Bronze green

Brunswick green

Dark sea grey

[RAF] Blue grey

Camo beige

Dark grey camo

Dark brown camo

Olive drap

Very dark drap

Antifouling

SI14 Color 3141 (20/60°)

Transparent

Jet Black

Signal Red

Ultra marine blue

Signal Grey

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



**New! Antifouling with
Invisible hull technology**



The Leader in Durability

*Did you know that our
Permanent Coating System
repels water and dirt and
lasts 30 Years+ ?*

Dealer